



TREE CONDITION CATEGORIES



A TREES OF HIGH VALUE AND QUALITY



B TREES OF MODERATE VALUE AND QUALITY C TREES OF LOW QUALITY AND VALUE




TREE CONSTRAINTS

TREE SURVEY BOUNDARY

Drawing to be interpreted with reference to the Arboricultural Assessment & Impact

Tree constraints shown are calculated from guidelines contained within BS5837 (2012)withn dimensions contained within Section 8 of the Tree Survey document. This outline should not be interpreted as the exact extent of root spread however it is considered the optimal area to be retained free of developmental impacts. Natural and/or man made barriers such as waterlogged soil or buildings may restrict the spread of tree roots. Crown spreads may also prove to be a constraint particularly where crown reduction may not be possible.

The constraints lines shown on this drawing are therefore a guide only. An on-site assessment should be undertaken in the event of any developments being planned within the areas shown for retained trees.

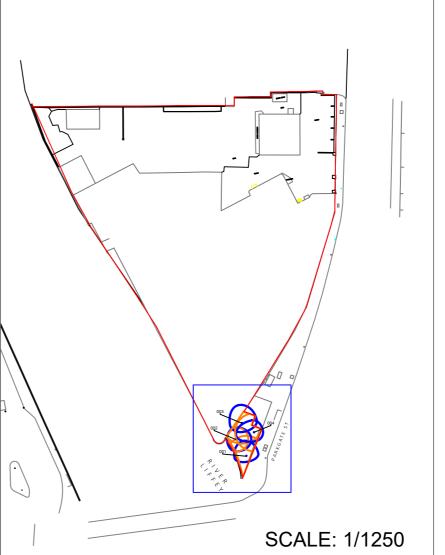

REVISIONS				
REV	DATE	DESCRIPTION		
PROJECT:				JOB NO.
42 PARKGATE STREET, DUBLIN 8				TPAR003
DRAWING: DATE:			SCALE:	
TREE SURVEY & CONSTRAINTS 26-10-23			1:100 @ A2	
DRAWN BY: CIARAN KEATNG				CK INITIALS
STATUS: PLANNING				
DRAWING NO: 101				